


箱体类

Box-type

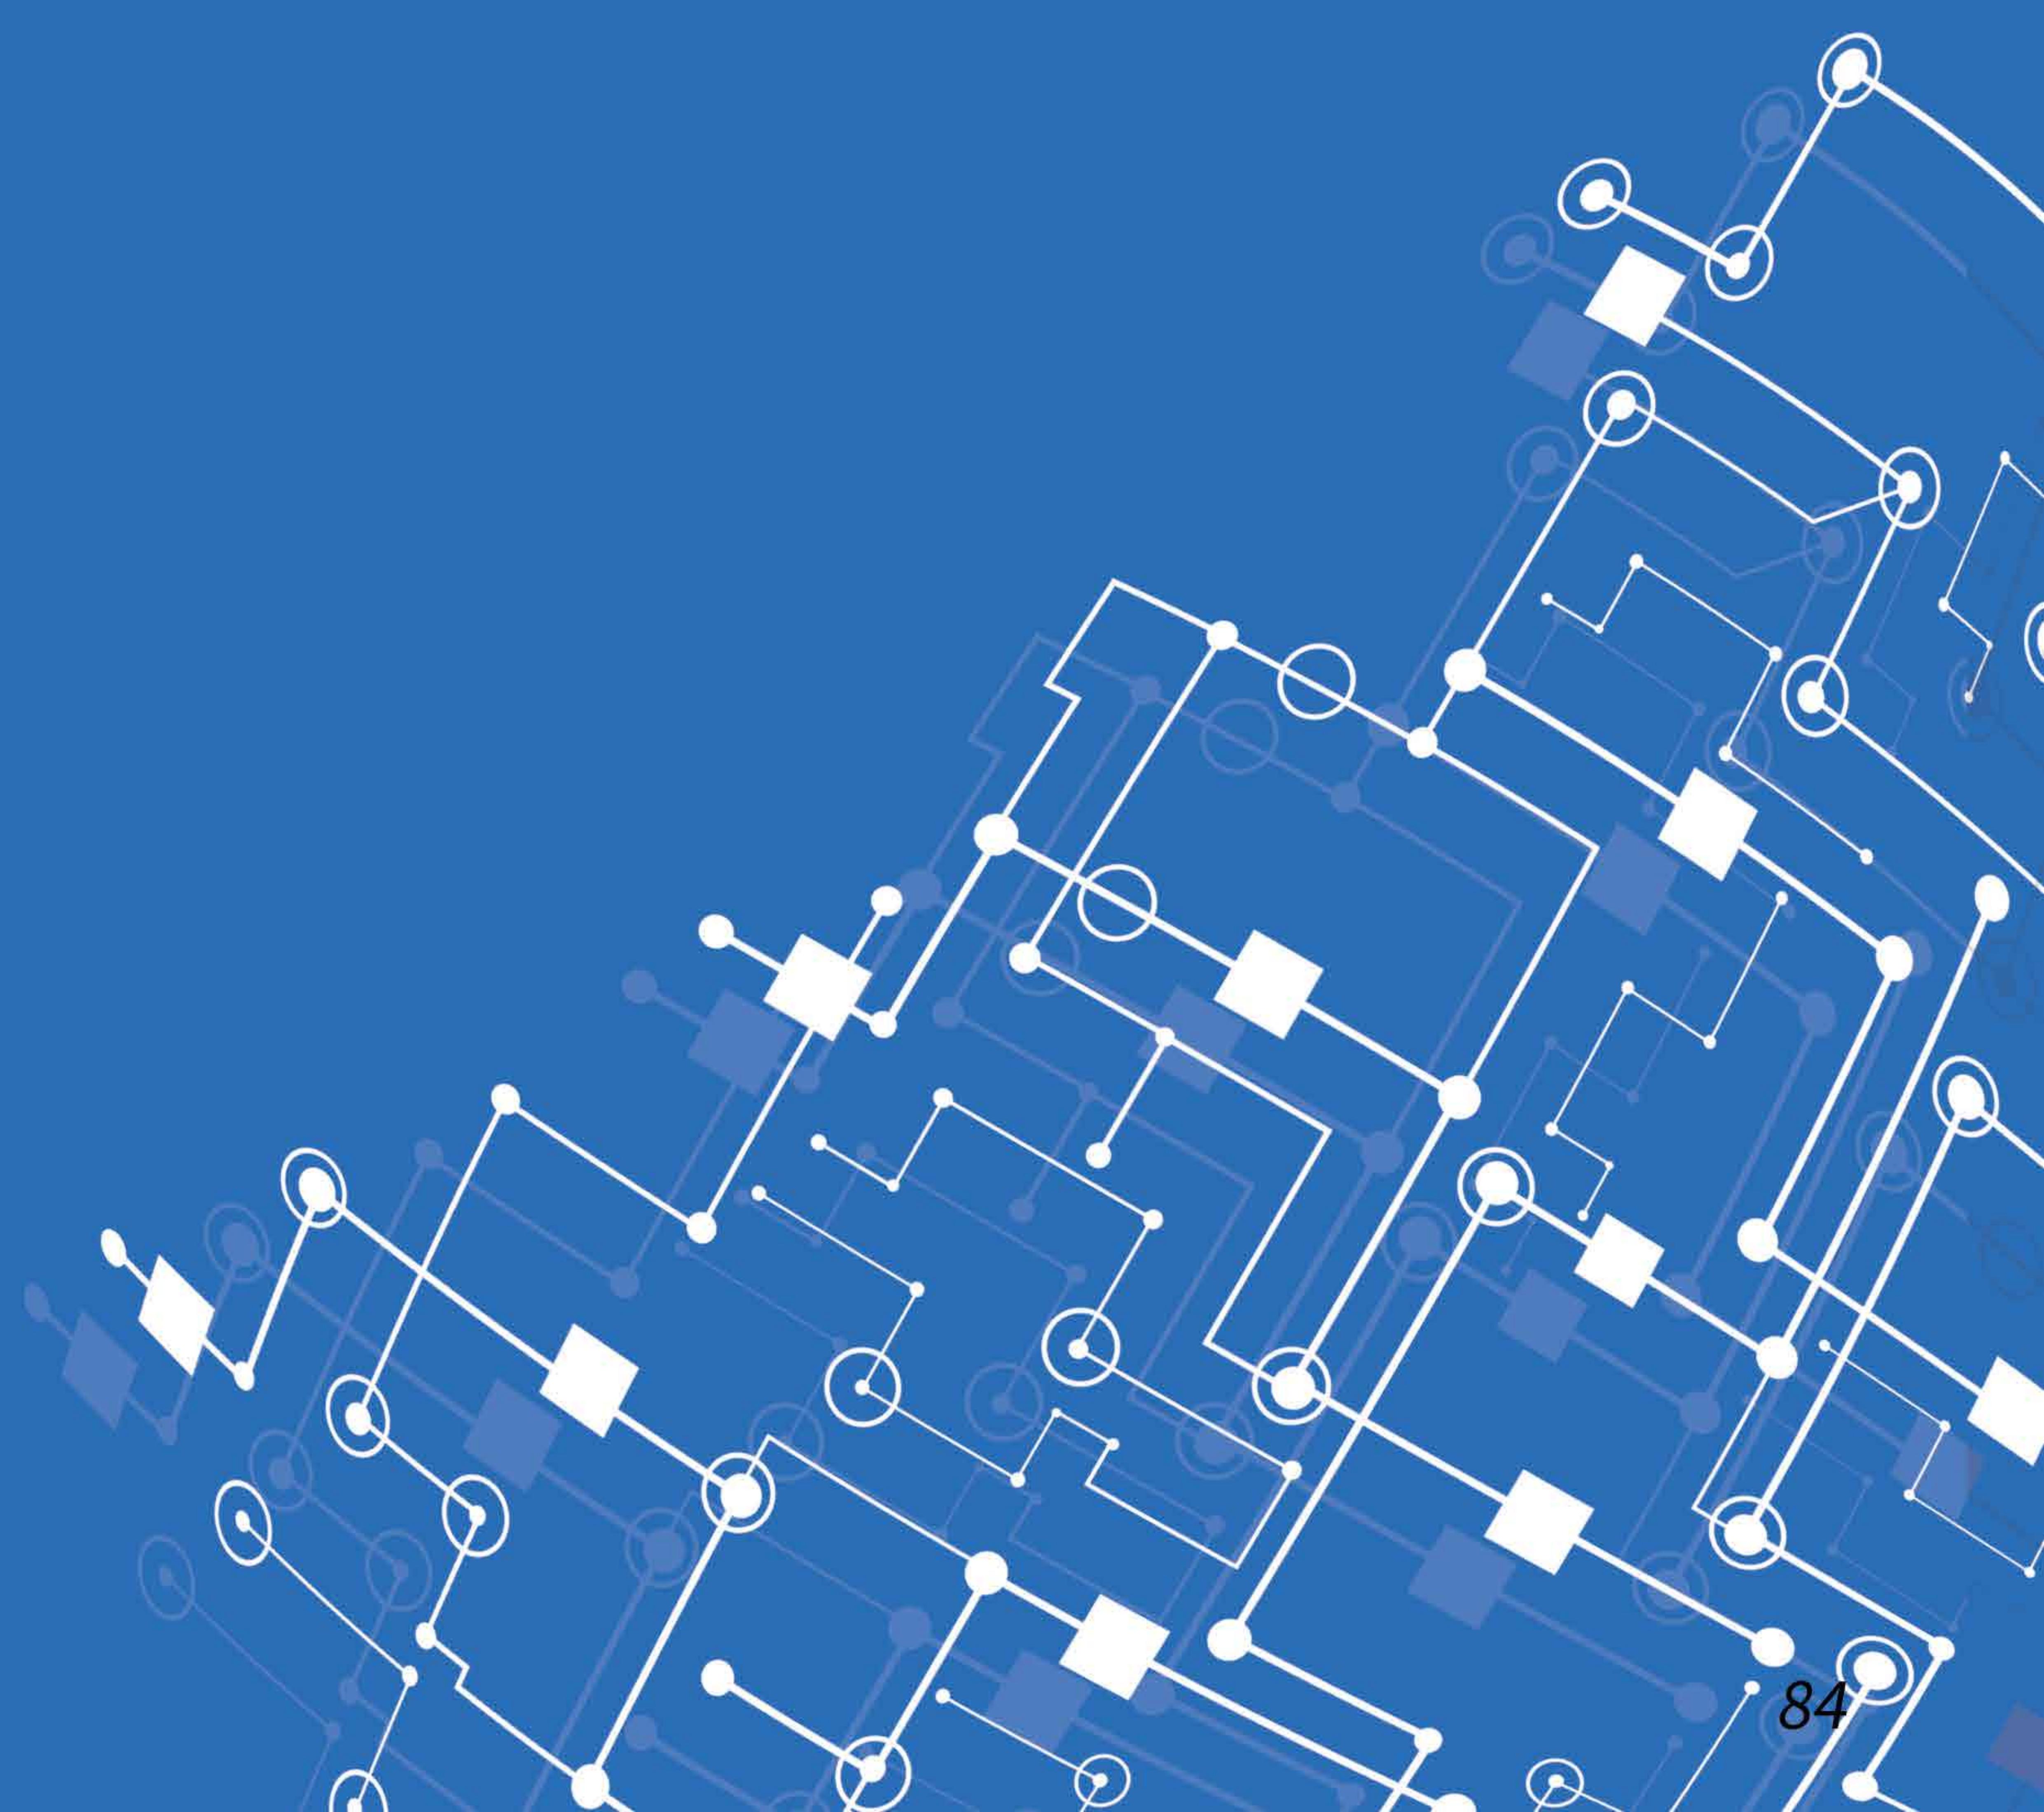

光缆交接箱系列

Fiber Optic Cable Transfer Box Series

产品描述

Product description

光缆交接箱系列产品是针对光纤接入网中馈线光缆与配线光缆交界处精心设计的户外光缆接口设备。箱体采用 SMC 高分子材料设计或双层不锈钢经高规格电镀喷塑处理制造，防护等级可达 IP65，可安装光分路器，构成完整的光缆互连、分光、配线一体化系统。目前我司交接箱产品分传统、无跳接、智能、共建共享、美化及扩容 6 大系列。

Fiber optic cable transfer box series products for optical fiber access network in the feeder cable and wiring cable junction carefully designed outdoor cable interface equipment. Box body is made of SMC polymer material design or double layer stainless steel after high specification plating coating processing manufacturing, protection grade reaches IP65, can be installed optical divider, form a complete cable interconnection, light, integrated wiring system. Currently our box product divides the traditional, no jumper, intelligence, co-construction and sharing, beautification and expansion 6 big series.

传统光缆交接箱

Traditional Cable Box



产品特点

Product features

- ◆ 光纤的分配和调度均在正面进行；
- ◆ 支持过路直熔功能；
- ◆ 箱体材质采用 SMC 或双层不锈钢，防护等级达到 IP65 级；
- ◆ 采用 12 芯熔配一体化模块，每个接续模块可单独抽出，操作方便；
- ◆ 卡式安装 FC、SC、LC 等多种适配器，适配器与机箱正面呈斜角，既保证了跳线的曲率半径，又可避免弧光灼伤眼睛；
- ◆ 根据安装方式有壁挂式、架空式、落地式。
- ◆ Pieces of optical fiber distribution and scheduling in front;
- ◆ Mixer support passing straight fusion function;
- ◆ Material by SMC or double layer stainless steel mixer enclosure, protection grade reaches IP65 level;
- ◆ By 12 core melting integration module, each connection module can separate out, easy to operate;
- ◆ Mixer cassette FC, SC, LC, and other adapter installed, the adapter from the positive Angle, not only ensure the jumper wire radius of curvature, and can avoid arc burns the eyes;
- ◆ Pieces according to the installation are wall-mounted, overhead, floor type.



订货指南

The ordering guide

产品名称	规格型号	规格 (mm) 高 × 宽 × 深	配线容量 (芯)	备注
SMC 箱体	GXF—H\$96	1025 × 545 × 295	96	单面操作
	GXF—HSI44	1025 × 545 × 295	144	单面操作
	GXF—HS288	1450 × 750 × 305	288	单面操作
	GXF—HS576D	1550 × 1460 × 360	576	单面操作
	G × F—HS576	1450 × 750 × 515	576	双面操作
	GXF—HSII52	1550 × 1485 × 600	1152	双面操作
不锈钢箱体	G × F—HB96	910 × 580 × 320	96	单面操作
	GXF—HBI44	1020 × 580 × 320	144	单面操作
	GXF—HB288	1400 × 750 × 320	288	单面操作
	GXF—HB576D	1550 × 1460 × 380	576	单面操作
	GXF—HB576	1400 × 750 × 515	576	双面操作
	GXF—HBI152	1600 × 1150 × 590	1152	双面操作

无跳接光缆交接箱

Wireless Connect Cable Box



产品特点

Product features

- ◆ 光纤的分配和调度均在正面进行；
- ◆ 提高主干光缆利用率，增加光分设备、使整个光缆网的资源调度灵活；
- ◆ 有利于提高网络利用率，发挥设备的功能潜力，使得光缆网布局更加合理，符合当前光缆网络结构的发展，同时资源利用更加灵活，降低光缆运营及维护的成本，避免光缆资源的浪费；
- ◆ 根据客户需求可安装盒式、插片式或托盘式光分路器；
- ◆ 根据安装方式有壁挂式、架空式、落地式；
- ◆ 箱体材质采用 SMC 或双层不锈钢，防护等级达到 IP65 级；
- ◆ 箱体可选配机械门锁或电子门锁；
- ◆ 箱体可具备直熔功能。

- ◆ The distribution of the optical fiber and scheduling are conducted on the front;
- ◆ Improve the utilization rate of backbone fiber optic cable to increase light equipment, the whole cable network resource scheduling flexibility;
- ◆ To improve network utilization, exert the function of the equipment potential, makes the more reasonable layout of cable network and conforms to the development of the current cable network structure, resource utilization is more flexible at the same time, reduce the cost of cable operation and maintenance, avoid the waste of cable resources;
- ◆ According to customer requirements can be installed cassette, inserting disk or optical divider tray type;
- ◆ According to the installation are wall-mounted, overhead, floor type;
- ◆ Material by SMC or double layer stainless steel box, protection grade reaches IP65 level;
- ◆ Cabinets are equipped with mechanical locks or electronic door lock;
- ◆ The can have the direct melt function.

订货指南

The ordering guide

产品名称	规格型号(不锈钢箱体)	规格型号(SMC箱体)	配线容量(芯)	光分槽位	备注
盒式无跳接	GXF-HB96YH	GXF-HS96YH	96	6	箱体尺寸同传统箱体
	GXF-HB144YH	GXF-HS144YH	144	6	箱体尺寸同传统箱体
	GXF-HB288YH	GXF-HS288YH	288	8	箱体尺寸同传统箱体
	GXF-HB576YH	GXF-HS576YH	576	16	箱体尺寸同传统箱体
	GXF-HB152YH	GXF-HS152YH	1152	32	箱体尺寸同传统箱体
插片式无跳接	GXF-HB96YC	GXF-HS96YC	96	10	箱体尺寸同传统箱体
	GXF-HB144YC	GXF-HS144YC	144	12	箱体尺寸同传统箱体
	GXF-HB288YC	GXF-HS288YC	288	24	箱体尺寸同传统箱体
	GXF-HB576YC	GXF-HS576YC	576	48	箱体尺寸同传统箱体
	GXF-HB152YC	GXF-HS152YC	1152	96	箱体尺寸同传统箱体

分光分纤箱 (PC)

Points Fibre Box



产品特点

Product features

- ◆ 箱体采用优质复合材料，全封闭式结构，防潮、防水、防尘、抗腐蚀耐老化性能优越，室内外通用，防护等级高达 IP55；
- ◆ 双层结构设计，上层为配线层，下层为光缆熔接层。光纤扩容、调配方便，配线盘可翻转操作，分层管理易维护；
- ◆ 具备背部提拉孔、壁挂安装定位点等功能，安装方便快捷，有利于大规模、低成本的快速部署；
- ◆ 满足配线光缆拖接功能。具备上行光缆及下行光缆成端暂存管理功能；
- ◆ 配置不同的安装附件，可实现壁挂或抱杆等多重安装方式。
- ◆ Mixer box body is made of high quality composite material, fully enclosed structure, moisture-proof, waterproof, dustproof, and corrosion resistance to aging performance is superior, the indoor and outdoor gm, protection grade up to IP55.
- ◆ Double-layer structure design, the upper for wiring layer, bottom is cable welding layer. Fiber expansion, easy deployment, wiring plate reversible operation, hierarchical management easy maintenance;
- ◆ Pieces have back lift hole, hanging installation anchor point, and other functions, convenient installation, is conducive to the rapid deployment of big, low cost;
- ◆ Pieces meet wiring cable cut function. Upward optical cable and downward cable into the temporary management functions;
- ◆ Configure different installation accessories, which can realize hanging or derrick multiple installations, etc.

订货指南

The ordering guide

型号	规格	尺寸 (mm)	备注
GF03-GS12SC	8 路	230*200*60	翻转式
GF03-GS24SC	12 芯	230*200*60	翻转式
GF03-GS12-2	16 路	360*280*100	翻转式
GF03-GS24-2	24 芯	360*280*100	翻转式
GF03-GS36-2	32 路	420*350*135	翻转式
GF03-GS48-3	48 芯	420*350*135	翻转式

分光分纤箱 (SMC)

Spectral Points Fibre Box (SMC)



产品特点 Product features

- ◆ 箱体采用优质复合材料，全封闭式结构，防潮、防水、防尘、抗腐蚀耐老化性能优越，室内外通用，防护等级高达 IP55；
- ◆ 双层结构设计，上层为配线层，下层为光缆熔接层。光纤扩容、调配方便，配线盘可翻转操作，分层管理易维护；
- ◆ 配置不同的安装附件，可实现壁挂或抱杆等多重安装方式。
- ◆ Mixer box body is made of high quality composite material, fully enclosed structure, moisture-proof, waterproof, dustproof, and corrosion resistance to aging performance is superior, the indoor and outdoor gm, protection grade up to IP55.
- ◆ Double-layer structure design, the upper for wiring layer, bottom is cable welding layer. Fiber expansion, easy deployment, wiring plate reversible operation, hierarchical management easy maintenance;
- ◆ Configure different installation accessories, which can realize hanging or derrick multiple installations, etc.



订货指南 The ordering guide



型号	规格	尺寸 (mm)	备注
GF03-GS / C16SC	16 路	380*290*100	
GF03-GS / C16SC-2	24 芯	380*290*100	
GF03-GS / C32SC-2	32 路	420*350*110	低盖
GF03-GS / C16SC-3	48 芯	420*350*110	低盖
GF03-GS / C32SC-3	32 路	420*350*160	高盖
GF03-GS / C32SC-3	48 芯	420*350*160	高盖



分光分纤箱 (冷轧板)

Points Fibre Box (Manufacture)



产品特点

Product features

- ◆ 箱体采用优质冷轧钢板或镀锌钢板制作，箱体表面静电喷塑工艺，防尘、抗腐蚀耐老化性能优越，安全性能高；
- ◆ 全封闭式结构，防潮、防水、防尘、抗腐蚀耐老化性能好，室外型箱体防护等级 IP55，室内型箱体防护等级 IP53；
- ◆ 配置不同的安装附件，可实现壁挂或抱杆等多重安装方式；
- ◆ 可选装盒式光分路器。
- ◆ Pieces of high quality cold-rolled steel plate or galvanized steel plate production, casing surface electrostatic coating process, dustproof, and corrosion resistance to aging performance is superior, the safety performance is high;
- ◆ Fully enclosed structure, moisture-proof, waterproof, dustproof, and corrosion resistance to aging performance is good, protection grade IP55 type outdoor enclosure, indoor type enclosure protection grade IP53;
- ◆ Configure different installation accessories, which can realize multiple installations such as hanging or derrick;
- ◆ Pieces can be optional cassette optical divider.

订货指南

The ordering guide

型号	规格	尺寸 (mm)	备注
GF03-BG / H12	24 芯	400*400*150	/
GF03-BG / H24	36 芯	400*400*150	/
GF03-BG / H48	48 芯	400*400*150	/
GF03-BG / H12-2	72 芯	600*700*150	/
GF03-BG / H24-2	144 芯	600*700*150	/



产品特点
Product features

- ◆ 箱体采用优质冷轧钢板或镀锌钢板制作，箱体表面静电喷塑工艺，防尘、抗腐蚀耐老化性能优越，安全性能高；
- ◆ 全封闭式结构，防潮、防水、防尘、抗腐蚀耐老化性能好，室外型箱体防护等级 IP55，室内型箱体防护等级 IP53；
- ◆ 插片式分光分纤箱采用双层结构设计，上层为配线层、下层为光缆熔接层，光纤扩容、调配方便。配线盘可翻转操作，施工维护方便快捷。



- ◆ Pieces of high quality cold-rolled steel plate or galvanized steel plate production, casing surface electrostatic coating process, dustproof, and corrosion resistance to aging performance is superior, the safety performance is high;
- ◆ Fully enclosed structure, moisture-proof, waterproof, dustproof, and corrosion resistance to aging performance is good, protection grade IP55 type outdoor enclosure, indoor type enclosure protection grade IP53;
- ◆ Mixer adopts double layer structure design of chip spectral points fiber box, upper for cable welding for wiring layer and the lower layer, fiber capacity, easy deployment. Wiring plate reversible operation, convenient maintenance construction.



订货指南
The ordering guide

型号	规格	尺寸 (mm)	备注
GF03-BG / C16SC	16 路	320*280*115	二槽位
GF03-BG / C32SC	32 路	400*330*120	四槽位
GF03-BG / C64SC	64 路	440*340*170	八槽位



共建共享光缆交接箱

Sharing Cable Box




产品描述

Product description

共建共享光缆交接箱是用于光纤接入网(电信网、移动网、联通网)三网主干光缆与FTTH小区配线光缆节点处的接口设备，可以实现大容量光纤的熔接、终端存储以及调度等功能。该产品的应用，减少了三网的重复线路建设，精简线路，美化环境。

Sharing cable transfer box is used for optical fiber access network (third) telecom network, mobile, unicom, webmaster do cable wiring and FTTH village node interface equipment, fiber optic cable can realize welding of large capacity optical fiber, terminal storage and scheduling, and other functions. The application of the product, reduce the three lines of repeated construction, concise lines, beautify the environment.

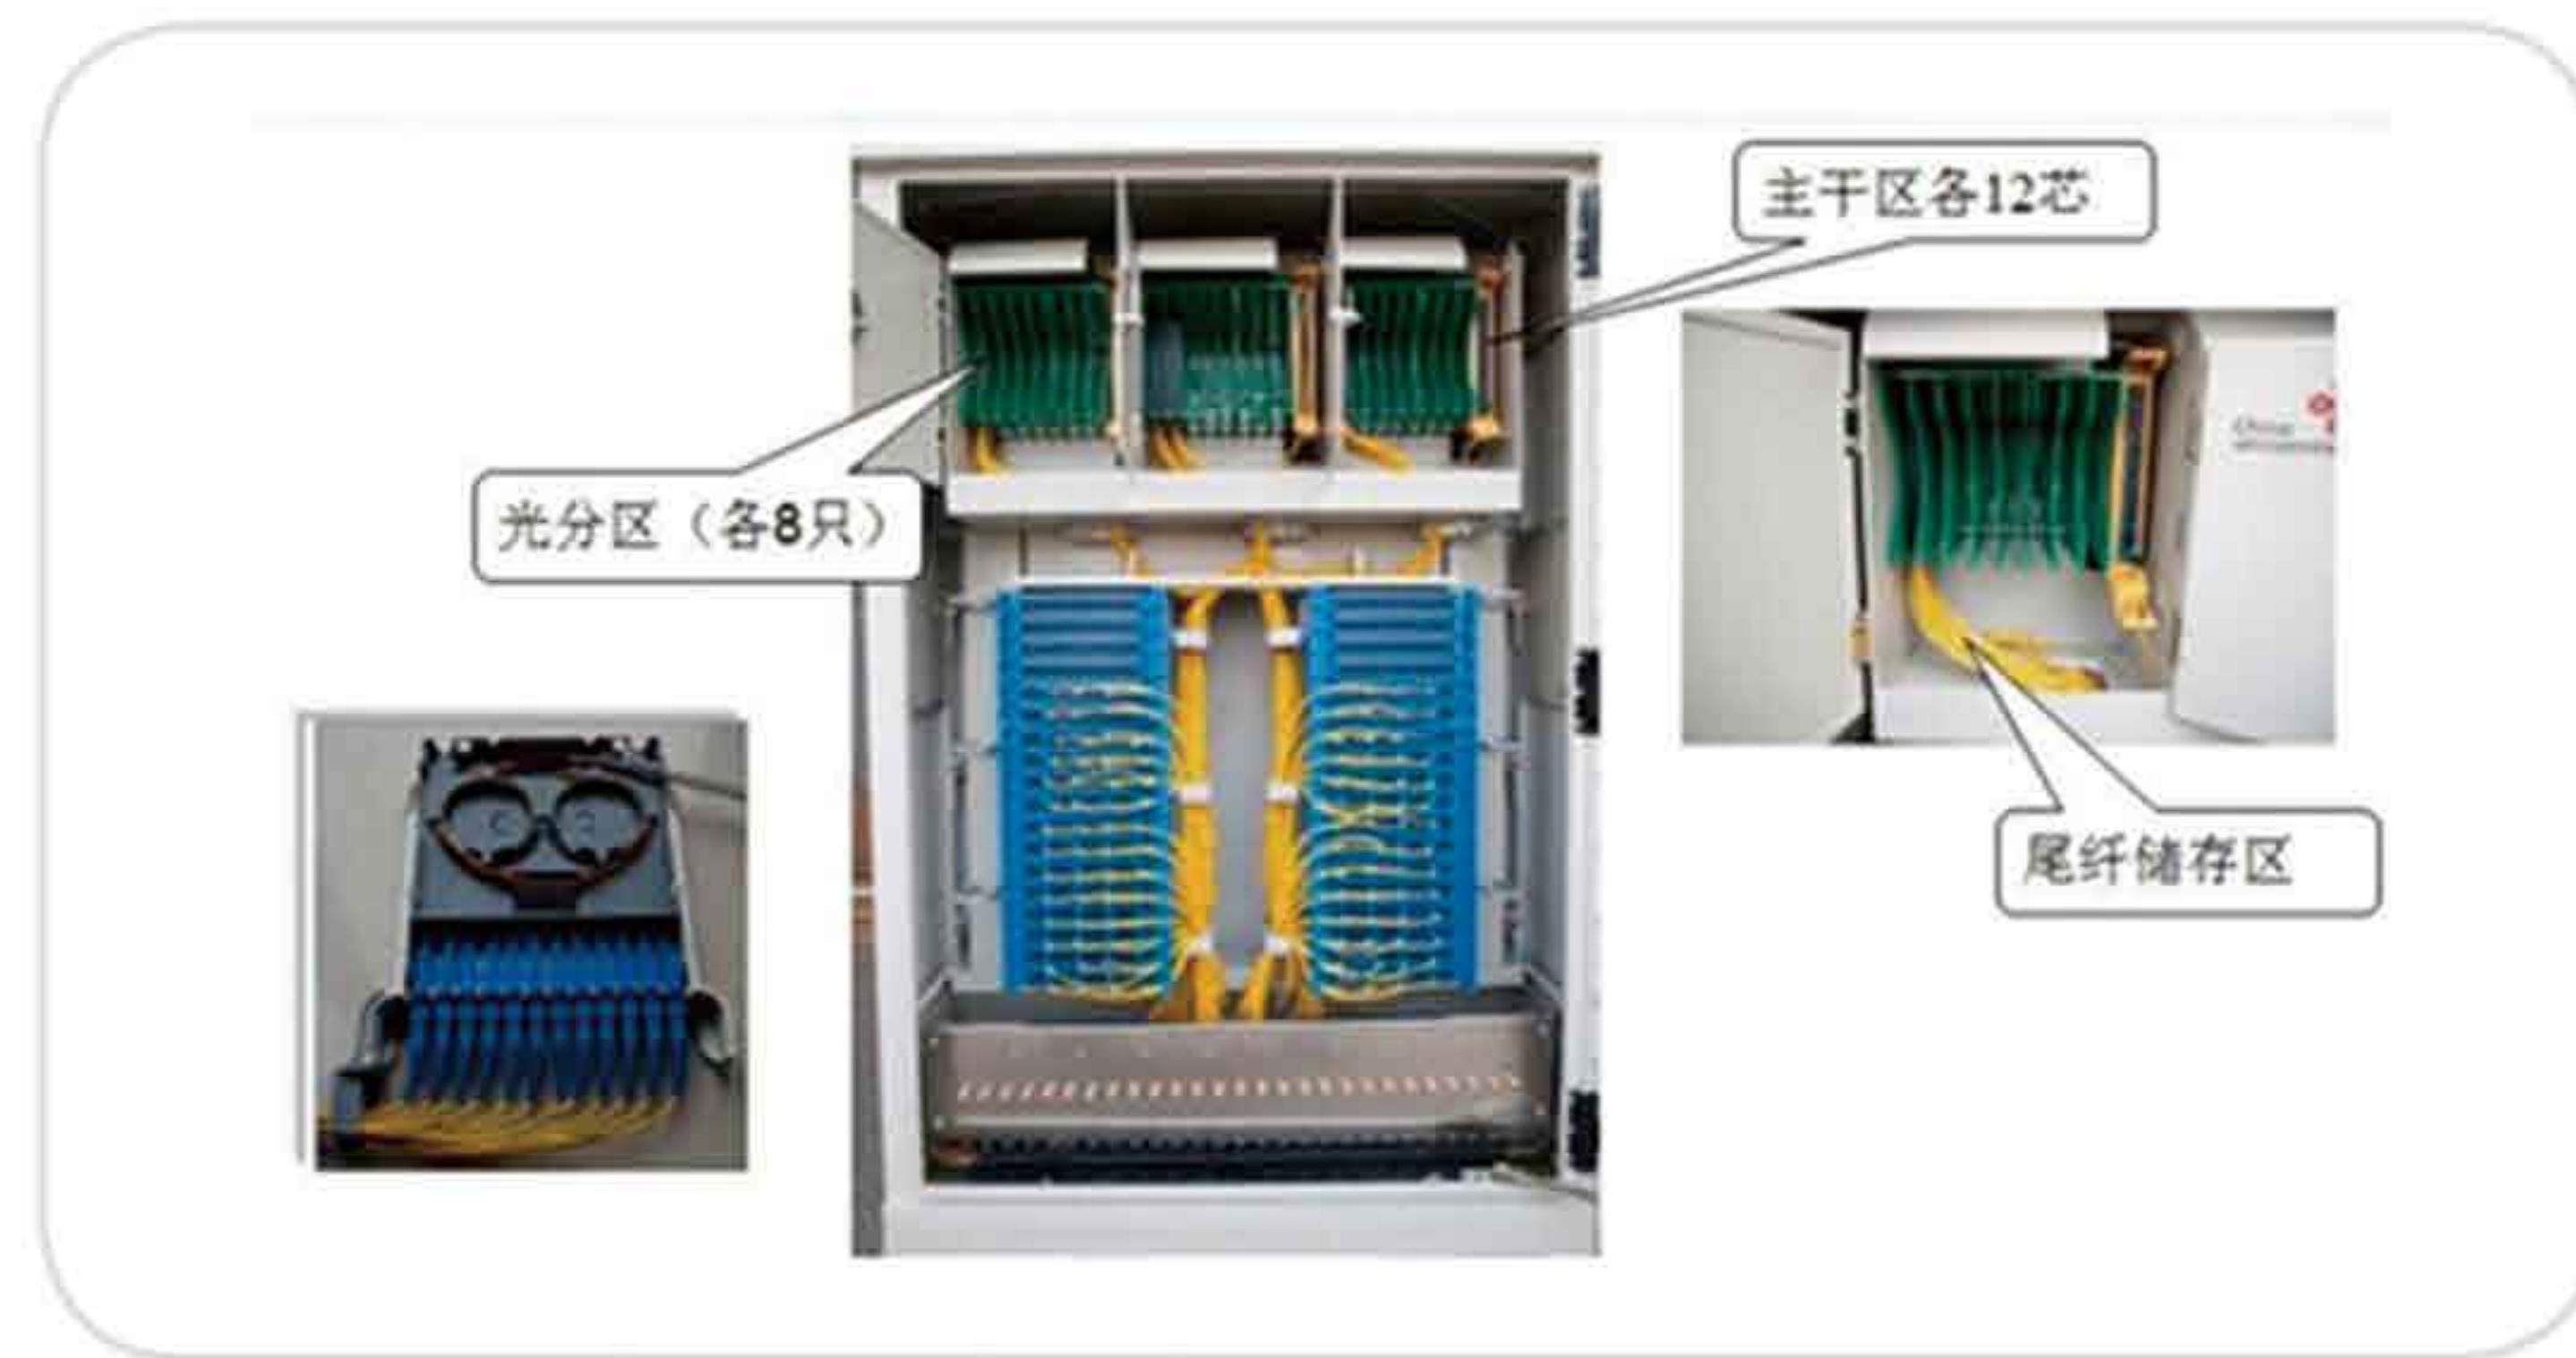

产品介绍

Product introduction

- ◆有效做到移动、联通、电信共建共享。大大节省了施工空间和施工强度；
- ◆箱体采用优质不锈钢材质，经静电喷塑处理，美观大方，线条清晰，防腐防水性能好，使用寿命长；
- ◆光分路器模块采用抽屉式模块化设计，具有很强的互换性和通用性；
- ◆采取左右结构和上下结构组合结构的设计，左右两边都有光纤熔接层，而右边上层为光分路器配线层，下层为光纤熔接层；
- ◆各种接头端接方便，安装灵活。用于配线间和设备间光缆的端接、使用和管理；
- ◆门锁采用优质户外防水锁，箱体兼容挂墙、落地、架空等安装方式；
- ◆具有临时尾纤存储区域；
- ◆支持各种光纤连接头的管理，如SC、LC、ST、FC等；
- ◆容量可根据实际使用需求定制。
- ◆ Pieces do mobile, unicom, telecom sharing effectively. Save the construction space and strength;
- ◆ Mixer box body is made of high quality stainless steel material, the electrostatic pensu processing, beautiful and easy, line is clear, waterproof anti-corrosion performance is good, long service life;
- ◆ Draw-out type mixer optical divider module USES a modular design, strong interchangeability and commonality;
- ◆ Pieces to take about structure and the structure design of composite structures, left and right sides have optical fiber welding layer, and on the right side of the upper for optical divider wiring layer, the lower for optical fiber welding layer;
- ◆ In pieces of various joint clamping is convenient, flexible installation. Used for wiring and equipment rooms of cable termination, use and management;
- ◆ Door lock is made of high qualified waterproof outdoor locks, cabinet compatible hanging wall, ground and aerial installation;
- ◆ In pieces with temporary tail fiber storage area;
- ◆ Support the management of the various kinds of fiber optic connectors, such as SC, LC, ST, FC, etc;
- ◆ Custom mixer capacity can be used according to actual demand.



宽带接入箱系列

Broadband Access Box Series

产品描述

Product description

瑞威宽带小型化接入箱包括 ONU 宽带箱、多媒体箱、监控箱、数据业务箱四大系列，产品多样化室内外结构设计，满足各类接入场景使用需求，产品并注重兼容不同厂家 ONU、视频前端、收发设备的安装应用，产品遵循 YD/T1313-2008《宽带接入用综合配线箱》行业标准。Ruiwei broadband miniaturization access box includes ONU broadband box, multimedia box, monitoring box, data service box four series, the product diversification of indoor and outdoor structural design, to meet the needs of various types of access scenarios, products and pay attention to compatible with different manufacturers ONU , Video front-end, transceiver equipment installation and application, product follow YD / T1313-2008 "broadband access with integrated wiring box" industry standard.

主要指标

Main indicators

环境要求:

- 工作温度: -20℃ ~ +45℃; 储存温度: -25℃ ~ +55℃,
- 贮存相对湿度: ≤ 75%;
- 相对湿度: 不大于 85% (+30℃);
- 大气压力: 70Kpa ~ 106Kpa。

电气指标:

- 机箱高压防护接地装置与机箱间绝缘电阻，在正常大气压条件下绝缘电阻≥ 1000MΩ ;
- 机箱高压防护接地装置与机箱间抗电强度：直流有效值 3000V，1min 无击穿、无飞弧。

光纤指标:

- 插入损耗: IL ≤ 0.2dB(PC 型); IL ≤ 0.3dB(APC 型);
- 回波损耗: RL ≥ 45dB(PC 型); RL ≥ 50dB(UPC 型); RL ≥ 60dB(APC 型);
- 互换性: ≤ 0.2dB;
- 重复性: ≤ 0.1 dB;
- 使用寿命: >1000 次。

Environmental requirements:

- Operating temperature: -20 °C ~ +45 °C ; Storage temperature: -25 °C ~ +55 °C ,
- Storage relative humidity: ≤ 75%;
- Relative humidity: not more than 85% (+30 °C);
- Atmospheric pressure: 70Kpa ~ 106Kpa.

Electrical Specifications:

- Chassis high voltage protection grounding device and the insulation resistance between the chassis, under normal atmospheric conditions, insulation resistance ≥ 1000MΩ ;
- Chassis high-voltage protection between the grounding device and the chassis between the electric strength: DC rms 3000V, 1min no breakdown, no arcing.

Fiber Specifications:

- Insertion loss: IL ≤ 0.2dB (PC type); IL ≤ 0.3dB (APC type);
- Return loss: RL ≥ 45dB (PC type); RL ≥ 50dB (UPC type); RL ≥ 60dB (APC type);
- Interchangeability: ≤ 0.2dB;
- Repeatability: ≤ 0.1 dB;
- Service life:> 1000 times.

ONU 宽带箱

Onu Broadband Box

FTTB 楼道型宽带接入箱总结了当前产品的优缺点，深入结合了当前布网的新要求；综合考虑了兼容各厂家 ONU 等设备尺寸、同时具有完善的防尘、散热等功能，具有外形简洁美观、体积适中、功能齐全、管理方便；箱体采用优质冷轧钢板精制而成，表面采用静电粉末喷塑处理，外形美观大方等优特点。

FTTB corridor-type broadband access box summarizes the advantages and disadvantages of the current products, in-depth combination of the current requirements of the new network; integrated consideration of the various manufacturers ONU compatible with the size of equipment, while a perfect dust, heat and other functions, Beautiful, moderate size, full-featured, easy management; box made of high-quality cold-rolled steel plate refined, the surface of electrostatic powder spray treatment, beautiful and generous beautiful features.

■ SPX01-BJ200T-1/2 型简约化设计，安装及操作便捷。

SPX01-BJ200T-1/2 type of simple design, installation and operation convenient.



订货指南

Ordering Guide

名称 Name	SPX01-BJ200T-1	SPX01-BJ200T-2
空箱体 Empty box	1	1
光缆端接件 – 熔纤盘 Fiber Optic Cable Terminations – Fused Disks	1	1
光缆端接件 –A86 面板 Cable termination – A86 panel	可选 Optional	可选 Optional
风扇组件 Fan assembly		1
防雷空开 Lightning protection	1	1
电源插座 Power outlet	可选 Optional	1
110 模块 50 对 / 条 110 modules 50 pairs / strip	200 对	200 对
ONU 配线模块语音 ONU wiring module voice	可选 Optional	可选 Optional
非标设备搁板 Non – standard equipment shelves	可选 Optional	可选 Optional
安装配件 Mounting Accessories	1	1
箱体尺寸 (高 × 宽 × 深) Cabinet size (H × W × D)	700×600×150mm	450×600×150mm

■ SPX03-BJ300T 型上下型独立配线区设计，设备安装支架可旋转，便于安装与维护。

SPX03-BJ300T upper and lower type independent wiring area design, equipment mounting bracket can be rotated, easy to install and maintain.



订货指南

Ordering Guide

名称 Name	SPX03-BJ300T
空箱体 Empty box	1
2 位 3 孔电源排插 2 bits 3-hole power strip	任选
防雷空开 Lightning protection	任选
110 配线架 110 patch panel	200 对
ONU 配线模块 ONU wiring module	1
箱体尺寸 (高 × 宽 × 深) Cabinet size (H × W × D)	800×600×130mm

■ SPX02-BJ300T 型 产品特点:

SPX02-BJ300T Product Features:

- 更清晰的分层设计，光部分、设备部分、IAD 设备部分；
- 尺寸更小，设计更美观，每个功能区进行了调整；
- 每层操作均不影响其他层；
- 光纤熔配区独立完成分光，熔接，配线功能；
- IAD 设备区独立完成，今后维护操作，随时跳线对用户进行接入；
- 设备区放置第一层，便于调测、维护；设备分层放置，维护人员容易识别，不混淆。
- Clearer layered design, light part, equipment part, IAD equipment parts;
- Smaller size, more beautiful design, each functional area has been adjusted;
- Each layer operation does not affect other layers;
- Optical fiber fusion area independently complete the splitting, welding, wiring function;
- IAD device area independently completed, the future maintenance operations, at any time jumper access to the user;
- Equipment area placed the first layer, easy to commissioning, maintenance; equipment layered placement, maintenance personnel easy to identify, not confused.



订货指南

Ordering Guide

名称 Name	SPX02-BJ300T
箱体 Box	冷轧钢, 静电喷塑 Cold-rolled steel, electrostatic spray
主缆端接 Main cable termination	熔纤盘 Fused disc 光插座 Optical socket 终端盒 Terminal box 快速连接器 Quick connector 熔纤盘 Fused disc
用户缆端接 User cable termination	快速连接器 Quick connector
分光插槽位 Split the slot	可选 (支持 2:32) Optional (support 2:32) cartridge
适配器面板 Adapter panel	12 / 条 12 / article
适配器 Adapter	FC / SC
空气开关 Air switch	3 支路 3 branches
电源插线排 Power plug line	4 / 6 口 4/6 mouth
接地线 Ground wire	黄绿双色 Yellow-green color
配线模块 Wiring module	300 对可选 50 对 / 条 300 pairs of optional 50 pairs / article
箱体尺寸 (高 × 宽 × 深) Cabinet size (H × W × D)	450×600×200mm

视频监控网络箱

Video Surveillance Network Box

视频监控控制箱是为满足通信运营商在“全球眼” / “宽视界”视频网络业务发展需要，根据《中国电信网络视频监控系统工程设计规范》和《中国电信网络视频监控系统工程施工及验收规范》要求而开发设计的视频监控前端一体化规范性设备，满足前端设备在电源、防雷、视频传输与网管、布线、室外箱体等整体要求，使运营商在工程建设中对视频监控前端箱安装与施工更规范与快捷，减少今后前端设备的维护工作量。Video surveillance control box is to meet the communications operators in the "global eye" / "wide vision" video network business development needs, according to "China Telecom Network Video Surveillance System Engineering Design Code" and "China Telecom Network Video Surveillance System Engineering Construction and Acceptance Video transmission and network management, wiring, outdoor cabinet and other overall requirements, so that operators in the construction of the video surveillance front-end (video surveillance front-end equipment) to meet the requirements of the front-end equipment in the power, lightning protection, video transmission and network management, Box installation and construction of more standardized and fast, reducing the future front-end equipment maintenance workload.

主要特点：

Main feature:

- 可选冷轧钢板或不锈钢板成型技术；
- 配备灵活耐用的 180 度铰链及精密防水钥匙系统；
- 可选多种的开启方式（向上、下、左、右开启方式）；
- 可靠的户外粉末保护涂层，超强承受日晒雨淋；
- 高弹性的发泡 PU 密封装置保证最高防护等级达 IP66；
- 多种外形及内部组合尺寸，适合不同设备安装要求；
- 可选的安装方式，挂墙式、挂杆式（圆杆或方杆）。
- Optional cold-rolled steel or stainless steel plate forming technology;
- Equipped with flexible and durable 180 degree hinge and precise waterproof key system;
- A variety of open mode (up, down, left, right open mode);
- Reliable outdoor powder protective coating, super to withstand the sun and rain;
- High elasticity PU foam sealing device guarantees the highest protection grade up to IP66;
- A variety of shapes and internal combination size, suitable for different equipment installation requirements;
- Optional installation, wall-mounted, rod-type (round bar or square bar).

主要技术指标：

Main Specifications:

- 箱门开启角度不小于 120° ；
- 箱体内非金属材料间及与箱体间的绝缘电阻大于 100MΩ；
- 箱体内非金属材料的燃烧性能达到 GB5169.7 标准实验 A 的规定；
- 工作温度 -25℃ ~ +50℃；
- 相对湿度 50% ~ 80%；
- 大气压力 86kPa ~ 106kPa。
- Opening angle of the door is not less than 120 ° ；
- Insulation resistance between non-metallic materials and the box body is more than 100MΩ；
- The combustion performance of the non-metallic materials in the box body meets the requirements of GB5169.7 Standard Test A；
- Working temperature -25 °C ~ +50 °C ；
- Relative humidity of 50% to 80%；
- Atmospheric pressure 86kPa ~ 106kPa.

■ SPX03-BJQ 型

SPX03-BJQ type



订货指南

Ordering Guide

型号 Model	规格 (mm) 高 × 宽 × 深 Dimensions (H × W × D) (mm)	安装方式 Installation
SPX03-BJQ1	750 × 455 × 210	壁挂 Wall
SPX03-BJQ2	650 × 450 × 200	挂杆、壁挂 Hanging rod, wall
SPX03-BJQ3	500 × 400 × 200	挂杆、壁挂 Hanging rod, wall

多媒体箱 Multimedia Box

多媒体箱产品分为两类，一是FTTx 接入 ONU 专用箱，二是家居传统型多媒体箱，产品材质为冷轧钢板，整体静电喷塑，外型精美大方；安装方式：墙体内嵌、墙壁贴挂。

The products are divided into two categories, one FTTx access ONU special box, the second is the traditional home-based multimedia box, cold rolled steel products for the product, the overall electrostatic spray, elegant appearance generous; Installation: wall embedded, Wall stickers.

■ SPX02-QJ(家居型多媒体箱)

SPX02-QJ (home-based multimedia box)

传统型多媒体箱用户家庭综合业务接入配线，内设各类业务模块，可实现同一业务接口室内多点分布：箱体可放置小型设备，比如路由器等。
Multi-media box User's home integrated service access wiring, equipped with various business modules, can achieve the same business interface Indoor multi-point distribution: box can be placed on small equipment, such as routers.



■ SPX02-QJ-2(ONU 专用型)

SPX02-QJ-2 (ONU special type)

ONU 专用多媒体箱专为 FTTH 接入 SFU 型 ONU 设计，同时可选择安装各类业务模块及入户光缆成端装置；产品体积小巧，适用于 FTTH。
ONU dedicated multimedia box designed for FTTH access SFU ONU design, and optional installation of various business modules and home cable into the device.



订货指南

Ordering Guide

项目 Item	SPX02-QJ	SPX03-QJ-2
适用场景 Applicable Scenes	家居 Home	ONU 专用 ONU only
箱体材料 Box material	优质冷轧钢板，整体静电喷塑 Quality cold-rolled steel, the overall electrostatic spray	
光缆端接件 A86 插座 Cable termination A86 socket	可选 Optional	可选 Optional
光缆端接件 4 芯熔接槽位 / 小型熔纤盘 Cable Termination 4-Weld Splice / Miniature Fuser	可选 Optional	可选 Optional
2 孔电源插座 2 hole power socket	1	1
CATV 端子模块 1 进 4 出 CATV terminal module 1 in 4 out	可选 Optional	可选 Optional
数据模块 Data module	可选 Optional	可选 Optional
防雷空开 Lightning protection	可选 Optional	1
小型蓄电池 Small batteries		可选 Optional
散热处理 Heat treatment	精美图案散热孔 Exquisite pattern of cooling holes	
尺寸 Size (mm)	280 × 395 × 110	385 × 290 × 150